


Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

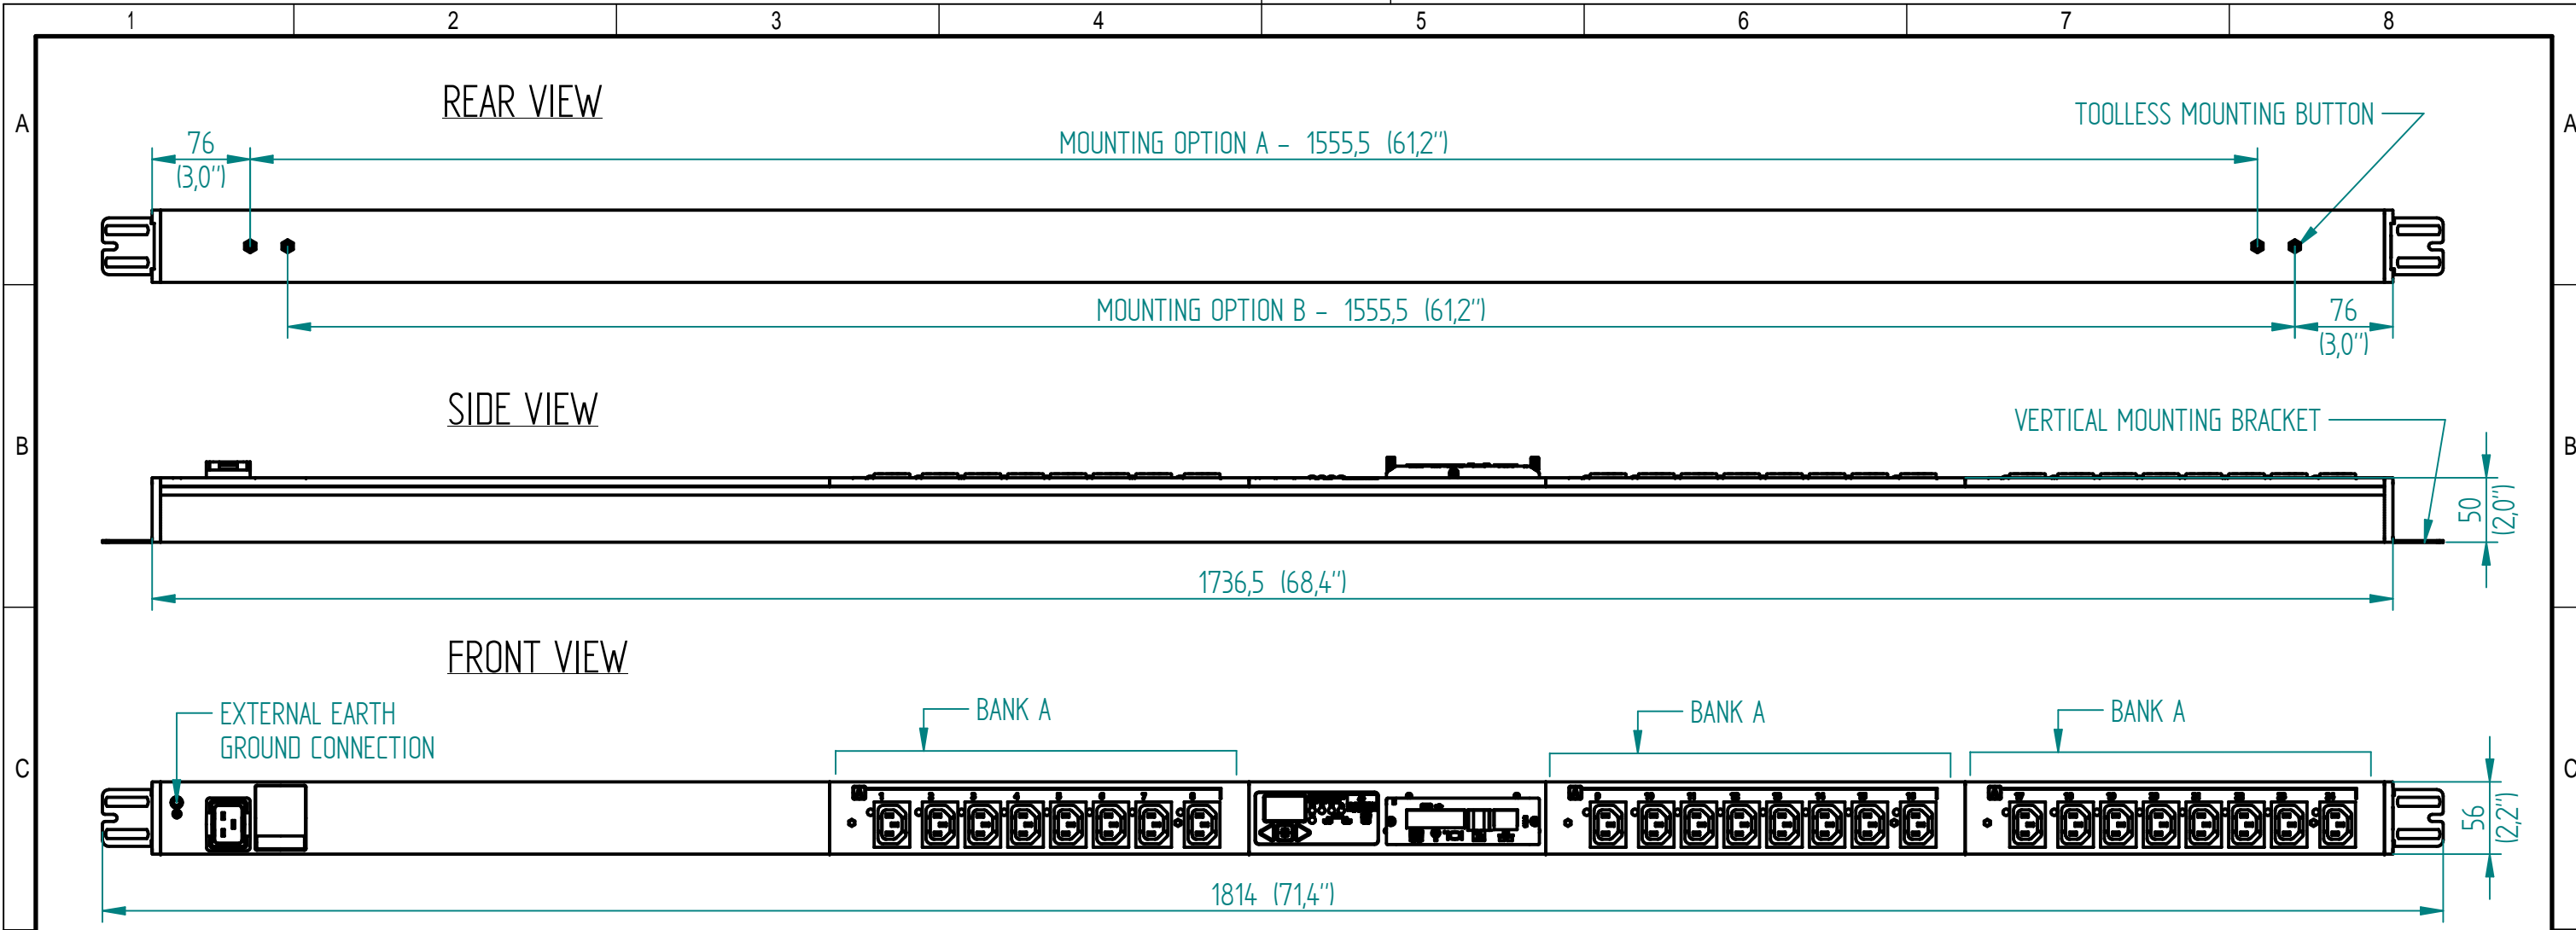

AGENCY COMPLIANCE:
 - UL certification: UL 60950-1 (2nd), CSA C22.2 No. 60950-1-07
 - CE-mark: LVD, EMC, RoHS (incl. harmonized standards hereunder)
 - CB certification: IEC 60950-1 (2nd)
 - BG certification: BV-BG (factory inspected)

ENVIRONMENTAL RATING:
 OPERATING TEMPERATURE: 5 °C - 60 °C (41 °F - 140 °F) NON-CONDENSING, NON-CORROSIVE, 10 % - 90 % RH
 STORAGE TEMPERATURE: -20 °C - 85 °C (-4 °F - 185 °F)
 MAX. OPERATING ALTITUDE: 2000 m

- NOTES:
 1. UNIT DIMENSIONS: 1736.5 mm (68.4") H x 50 mm (2.0") D x 56 mm (2.2") W
 2. UNIT WEIGHT: 4 kg/8.8 lbs
 3. SHIPPING DIMENSIONS: 2017 mm (79.4") H x 297 mm (11.7") D x 176 mm (7.0") W
 4. SHIPPING WEIGHT: 6.81 kg/15 lbs
 5. (2) MOUNTING BUTTONS AND (2) MOUNTING BRACKETS SUPPLIED WITH EACH UNIT. EITHER OPTION CAN BE USED TO MOUNT THE PDU.

OUTPUT POWER

| BANK | PHASE | RECEPTACLE TYPE (QUANTITY) | VOLTAGE (V) | MAX. CONTINUOUS AMPS (A) | |
|------|-------|----------------------------|-------------|--------------------------|----------|
| | | | | PER RECEPTACLE | PER BANK |
| A | L1 | 24XC13 | 100-240 | 10 | 16 |

INPUT POWER

| INPUT CORD | INPUT SOCKET | WIRE COUNT | FREQUENCY (Hz) | VOLTAGE (V) | RATED AMPS (A) | MAX. CONT. AMPS (A) |
|------------|---------------|--------------|----------------|-------------|----------------|---------------------|
| - | IEC 60320 C20 | 1/N/PE, 2/PE | 50/60 | 100-240 | 16 | 16 |

| METERING PARAMETER | MEASUREMENT ACCURACY |
|--------------------|--|
| VOLTAGE | ±1 % + 0.1 VAC |
| CURRENT | ±1.5 % + 0.01 A FROM 1 % TO 10 % OF UNIT RATING; ±1 % FROM >10 % TO 125 % OF UNIT RATING |

RoHS COMPLIANT

| | | | | | |
|-----------------------|---|----------|----------------------|------------------------------|-----------------------|
| | Allgemeintoleranzen General tolerances | | Oberfläche Finish | Werkstoff / Material | Gewicht: Weight: - |
| | - | | - | - | - |
| Dimensions in mm | | Date | Name | Bezeichnung / Description | |
| | | Drawn | 10/12/15 | Blass | |
| | | Checked | 10/12/15 | Votýpka | |
| | | Approved | - | - | |
| | | | | Zeichnungs-Nr. / Drawing no. | |
| | | | | MPHR1241 | |
| Rev. Change Date Name | | | | Verwendet in / Used in | |
| | | | | - | |
| | | | | Blatt/Sheet 1/1 | |